



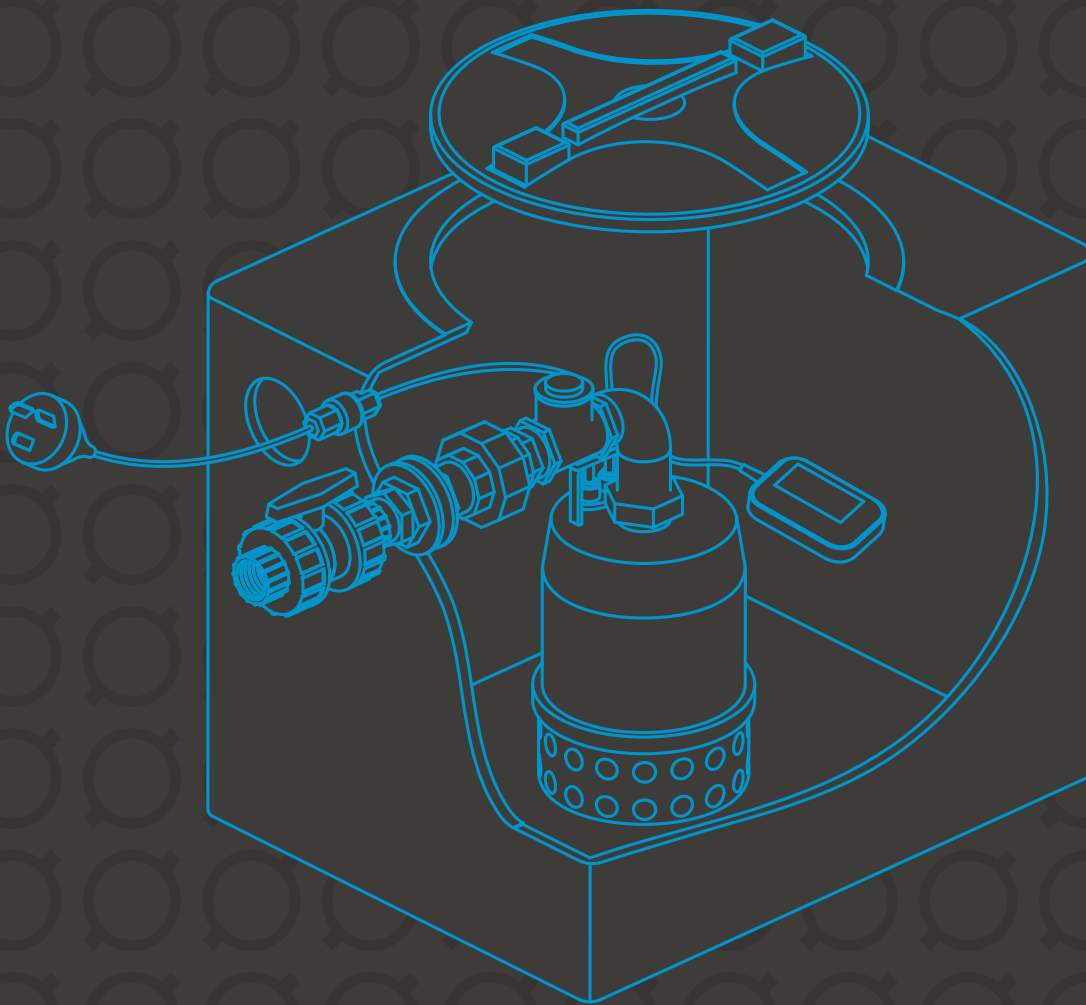

The DrainAce Compact undersink pump station is the ultimate solution for applications where gravity discharge from a sink or other appliance to a sewer connection or treatment device (e.g. grease arrestor) is not available.

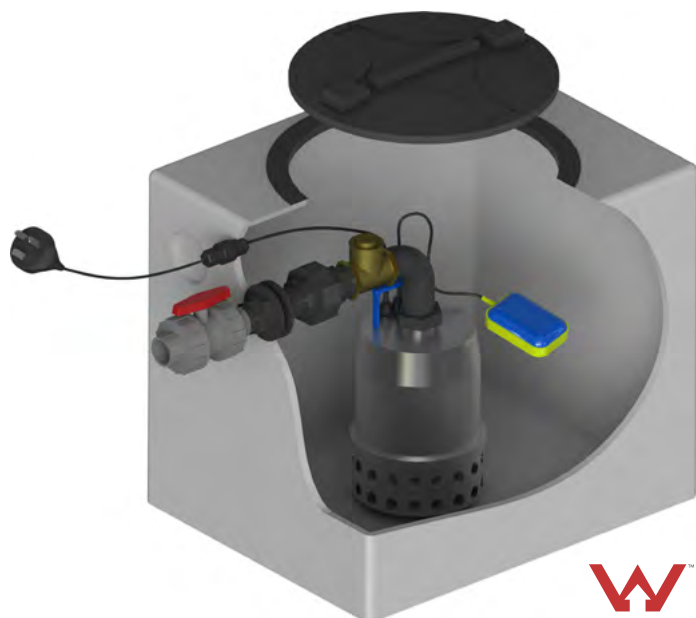

Prime examples of the uses of a DrainAce Compact pump station are restaurants, boardrooms, basements of high-rise buildings, laboratories, doctor and dental surgeries, construction sites and portable buildings. Units are also available for greasy waste discharge to grease arrestors, and can handle discharge up to 40 °C from dishwashers and glass washing machines.

Designed for quick and simple installations, the unit fits neatly into a single cupboard below a sink, and runs with virtually no noise. All in-tank plumbing is included with a discharge outlet at one end, with provision for vent and inlet connections on either end.

The chamber is moulded from chemical-resistant polyethylene and fitted with a rugged stainless steel 240 V Global Water automatic submersible pump capable of passing up to 10 mm soft solids.

Features

- 90 L polyethylene tank for emergency storage and heat dilution.
- Gas-tight screwed lid.
- Quick-connect Uniseal® fittings for inlet and vent.
- Discharge ball valve.
- Global Water stainless steel pump with float switch.
- Quick-release waterproof electrical connection for easy pump removal.
- High-level alarm option available.

DrainAce Compact

Undersink pump station


Specifications

Model	Pump size	Ø Solids (mm)	Volts (V)	Power (kW)	Amps (A)	Outlet (mm)	Weight (kg)
GPD200	GPD32-25	10	240	0.25	1.9	32	15
GPD300	GPD32-55	10	240	0.55	3.5	32	18

*To order with an optional high level alarm, add 'HL' to model number, e.g. 'GPD300HL'

Specification drawing

- 1 90 L polyethylene tank.
- 2 Polyethylene gas-tight screw lid.
- 3 Global Water automatic submersible pump.
- 4 Swing check valve.
- 5 Barrel union on internal pipework for pump removal.
- 6 32 mm discharge true union ball valve to allow system isolation and complete tank removal.
- 7 50 mm inlet/vent connections with Uniseals supplied.
- 8 IP68 quick connector for ease of pump removal.
- 9 3 m power cable - suits standard single phase 10 A GPO.

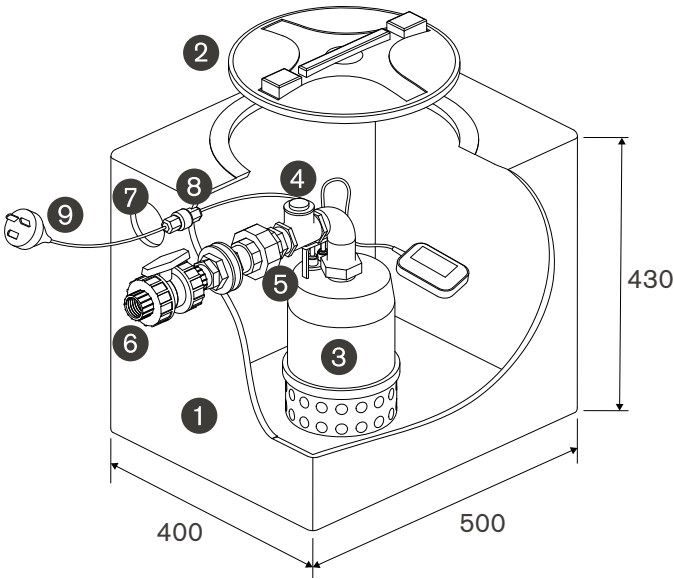

All measurements in mm

Performance curve

