


In response to growing community awareness of the need to recycle water, the Global Water RainAce™ Rainwater Harvesting Pressure System range has been released.

Suitable for domestic, commercial or industrial use, units are fully tested prior to despatch and designed for simple on-site installation. The systems will automatically change over to mains water on low rain water tank level or when the mains electricity supply fails.

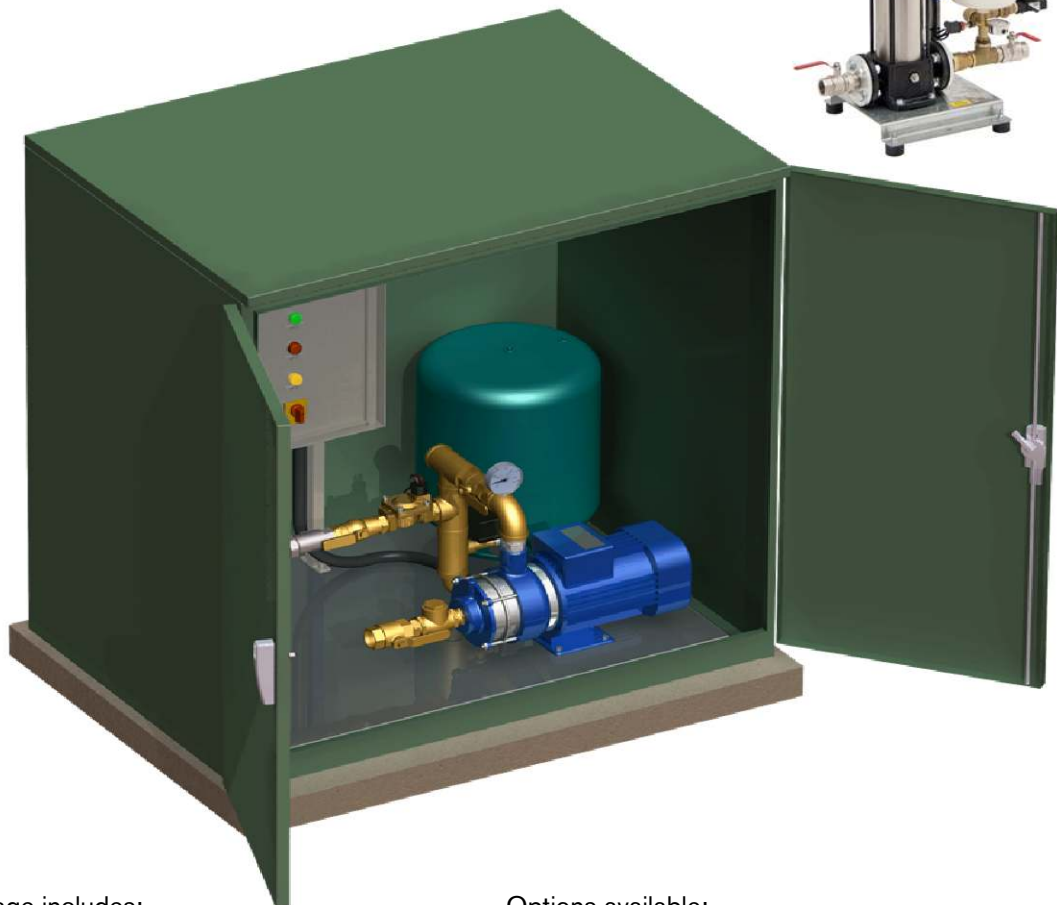

Standard package includes:

- Flow rates from 0.5 litres/sec
- Pressures to 800kPa
- Testable double check valve
- Solenoid change-over valve
- Pump isolation ball valves
- Kwikstart control panel
- 10m low level cut-out float switch
- Powder coated galvanised steel base

Options available:

- Submersible or pumps
- Single or twin pump systems
- Constant pressure with VF drive
- Lockable powder coated enclosure and slab
- RPZ valve for underground tank use
- Low voltage level probes
- UV treatment systems
- Particle filtration from 5 microns