

Designed for larger commercial and industrial applications, this pump is ideal for trouble-free pumping of effluent, wash-down and stormwater in commercial and industrial applications, particularly where solids and stringy material need to be handled.


Units are fitted with a powerful 1.8 kW 3-phase motor incorporating an EasyFit plug-in cable for simple disconnection and replacement.



Technical data

Outlet (mm)	50 BSP
Max flow rate (L/s)	9
Max head (m)	16
Max liquid temp (°C)	40
Ø Solids (mm)	40
Power (kW)	1.8
Current (A)	4.1
Voltage (V)	415
Speed (RPM)	2900
Casing	Cast iron
Impeller	Polyamide vortex
Motor housing	Stainless steel
Protection	IP68
Cable details	10 m length, H07RN8-F
Mounting	Free-standing or guide rails
Weight (kg)	20

Dimensions (all measurements mm)

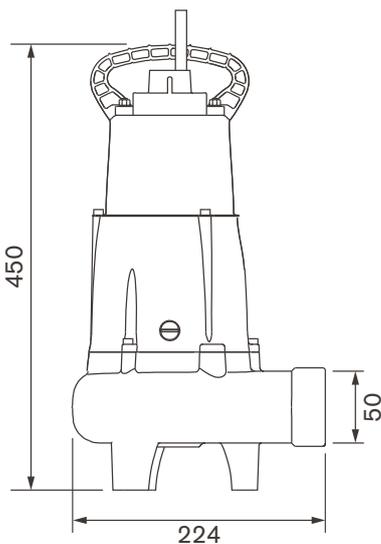

Performance curve

