




# DrainAce® Pressure Sewer Packaged Pump Station

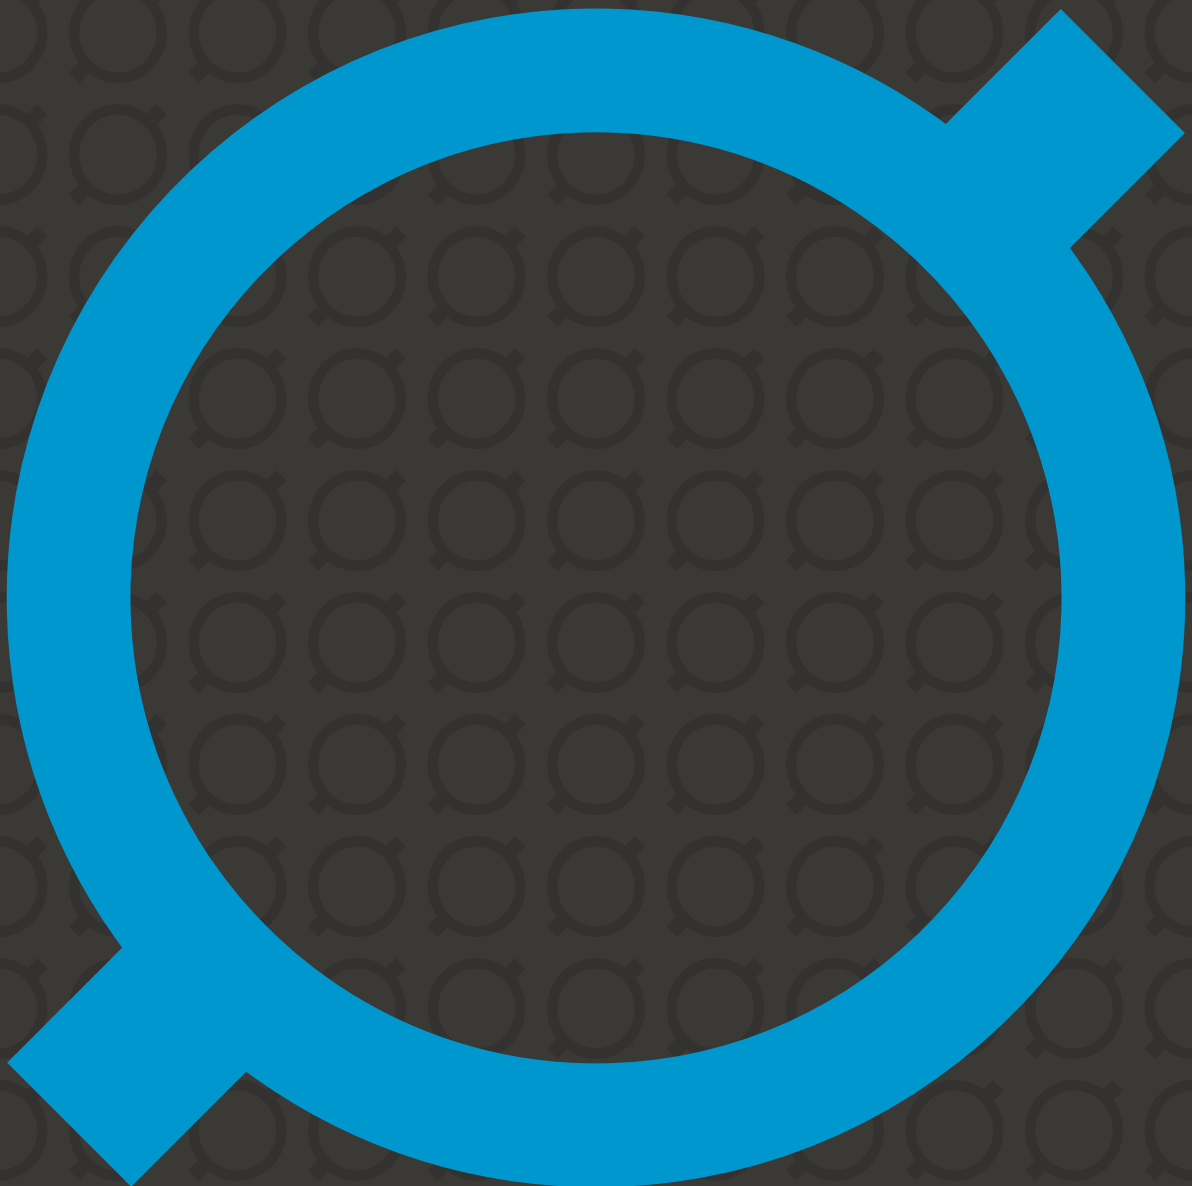


# DrainAce® Pressure Sewer Packaged Pump Station

## DAP 10P Simplex pump chamber

The Global Water DrainAce pressure sewer pump station collects, grinds, and pumps sewage fully automatically. The 1050 L polyethylene high strength pump chamber complies with AS/NZS 1546.1:2008 and is Department of Health approved.

At the heart of the system is a unique high head grinder pump that can pump long distances through small bore pipes. This means difficult locations in steep terrain or high-water table areas can now be connected to the sewer. Developers, community planners, and homeowners have the freedom to develop areas that may have previously been unfeasible due to high water table or rock.


The DrainAce pressure sewer pumping system is robust and almost maintenance free, with built-in pump overload and overpressure protection.

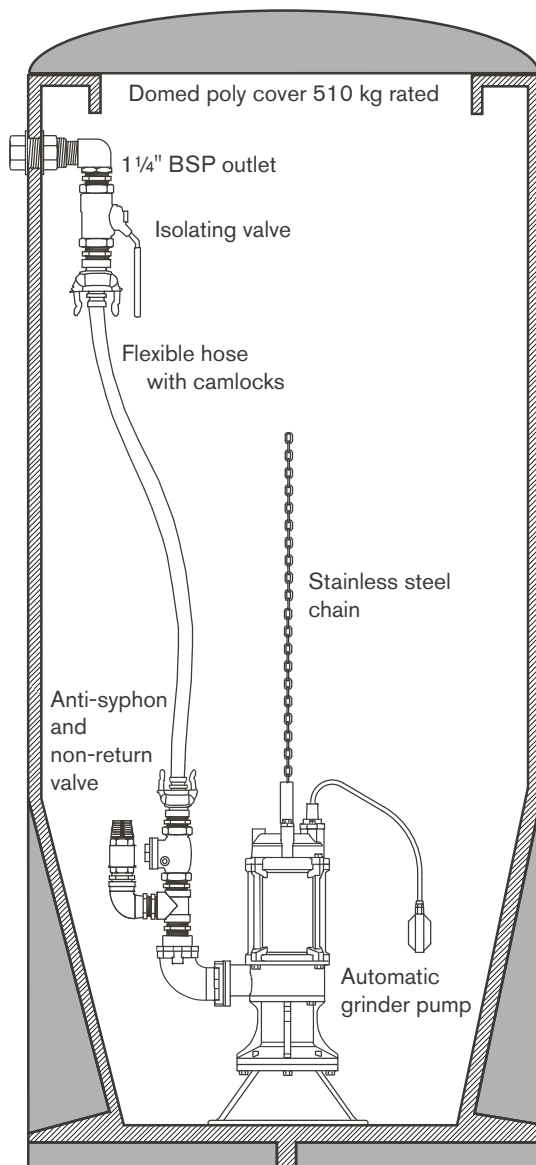

## Tech data

Poly chamber	Ø850 x 2160 mm
Capacity (L)	1050
Pit weight (kg)	70
Cover	Ø600 (510 kg rated)
Pump model	GPGH32-110W
Pump type	Helical rotor grinder
Discharge size	32 BSP
Max head (m)	50
Max flow (L/m)	50
Motor (kW)	1.1
Current (A)	9.0
Voltage	240
Protection	IP68
Cable (m)	10
Pump weight (kg)	42

## Performance curve

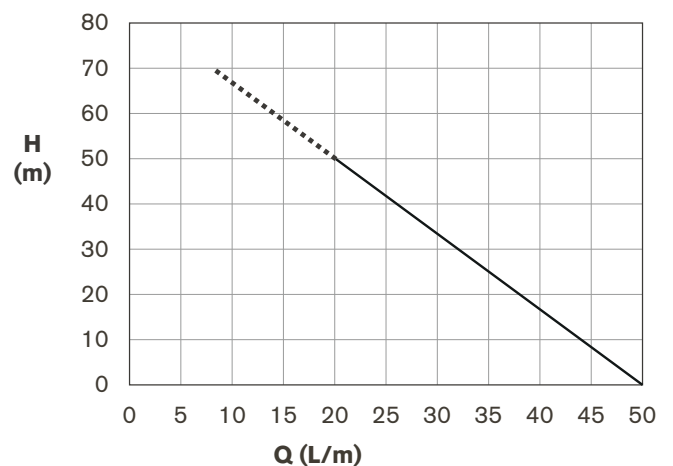

Ø600 fitted polyethylene or composite resin access cover